



## TECHNICAL SHEET


### PERFORMANCE AND DIMENSIONS

#### Main features

An articulated platform with a pantograph and a two-stage telescopic boom plus jib.

This combination, together with its stabilizers of high levelling capacity, three working areas and long horizontal reach, makes it ideal for all outdoor works, even in extreme conditions.

Max. working height	<b>21,6 m</b>
Max. reach with 80 kg	<b>12,5 m</b>
Platform height	<b>19,6 m</b>
Max. load in basket	<b>230 kg</b>
Basket dimensions	<b>1,4 x 0,7 x 1,1 m</b>
Basket rotation	<b>+/-90° (options)</b>
Turret rotation	<b>+/- 355° (710° continuous)</b>
Total weight	<b>3025 Kg</b>

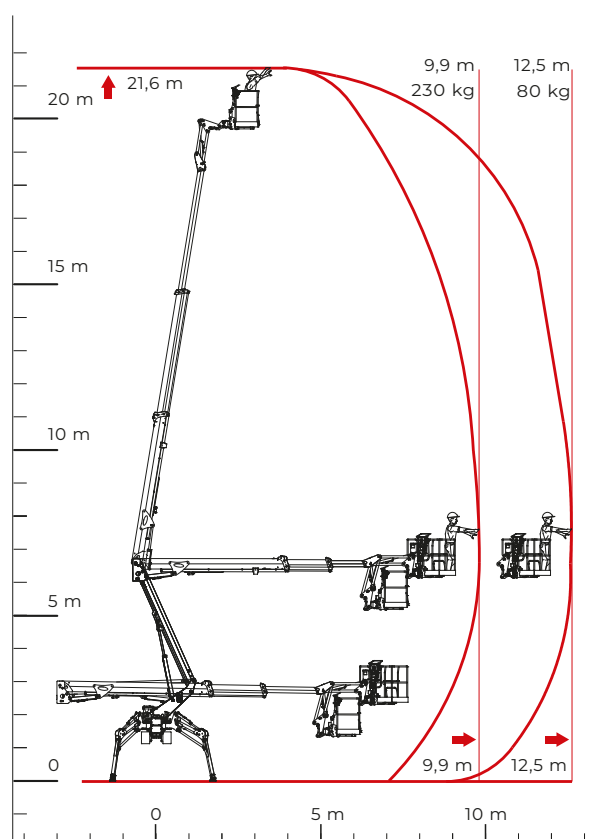

C.M.C. s.r.l.  
Via Bitritto, 119 - 70124 Bari - Italy  
Tel. +39 080 532 66 06  
cmclift.com - info@cmclift.com



